



ISO 9001 CERTIFIED

DNH

HEAD OFFICE, NORWAY

DNH AS

Phone..... + 47 35 98 56 00

Fax..... + 47 35 98 56 10

E-mail..... dnh@dnh.no

Web-Site..... www.dnh.no

ENGLAND

DNH WW Ltd

Phone..... + 44 1908 275 000

Fax..... + 44 1908 275 100

E-mail..... dnh@dnh.co.uk

GERMANY

DNH GmbH

Phone... + 49 040 6569 30-0

Fax..... + 49 040 6569 30-30

E-mail..... dnh@dnh.de

USA



DNH Speakers Inc

Phone..... + 1 484 494 5790


Fax..... + 1 484 494 5793

E-mail..dnh@dnhspeakers.com

BP-361T

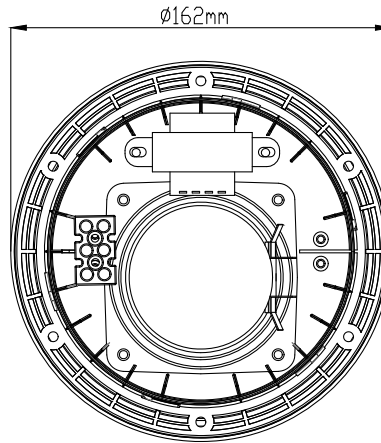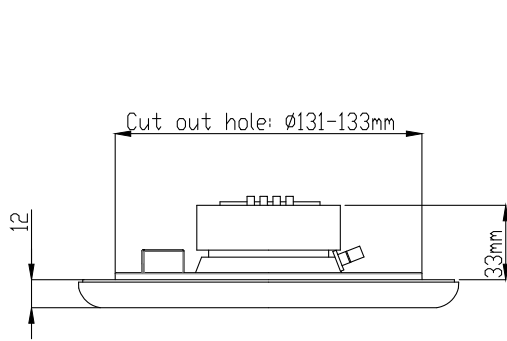

CIRCUIT DIAGRAM




70/100 Volt combined transformer
Primary connections

White : Green 70 V
White : Red 100 V


Secondary nominal tapings

| | |
|---------|-------|
| C : 6W | 6,0 W |
| C : 3W | 3,0 W |
| C : 1,5 | 1,5 W |
| C : 0,5 | 0,5 W |

Low impedance



Sound pressure levels at 1W/1m
SPL vs Freq

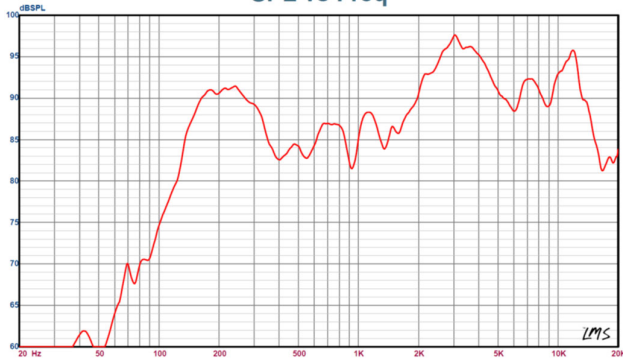

Specifications

| | |
|-----------------------|-------------------------|
| Material / Color | Aluminum, ABS / RAL9010 |
| Mounting | Screws |
| Termination | Ceramic terminal |
| Weight w/transformer | 0,52 kg |
| IP-rating | NA |
| Max. / min. amb. temp | 90°C / -20°C |
| Rated power | 6 W |
| SPL 1W/1m | 90 dB |
| SPL rated power | 97 dB |
| Effective freq. range | 120 – 20000 Hz |

Installation, Operation and Maintenance Procedures

- Connect cable to terminal and select required tapping into the transformer.
- If 70V, replace red cable with the green cable in the terminal.
- Install loudspeaker to wall/ceiling by four to six screws. Push loudspeaker grille gently into fixed position.
- For optimum performance, always use the correct voltage, power, and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with two years warranty against defective workmanship.

DNH reserves the right to alter specifications without notice

